


Key Features

- Quad-Core SoC with 4 GB RAM delivers smooth, stable performance.
- **Fast warm boot** launches signage and content in under seven seconds.
- USB playback with signal failover ensures continuous content delivery.
- 4K UHD in any orientation provides sharp, professional visuals.
- **500-nit brightness and 24/7 operation** support reliable round-the-clock signage.



Product **Description**

The ViewSonic CDE14-2C Series is a commercial-grade 4K display built for 24/7 operation in offices, retail spaces, transit hubs, and other high-demand environments. Powered by Android 14 (upgradeable to Android 16) and a quad-coreSoC with 4 GB RAM, it supports smooth multitasking and fast warm boot for immediate startup. With 500 nits ofbrightness and support for both landscape and portrait modes, it delivers sharp, high-impact visuals forpresentations and signage alike. Continuous USB media playback with automatic signal failover ensures uninterrupted content delivery, even when the primary source is lost. Designed for IT and AV professionals, the CDE14-2C Seriesintegrates seamlessly with leading ProAV control systems and ViewSonic Manager for streamlined deployment and remotemanagement. Whether deployed as a standalone unit or as part of a larger installation, it provides a dependablesolution for corporate and commercial environments.

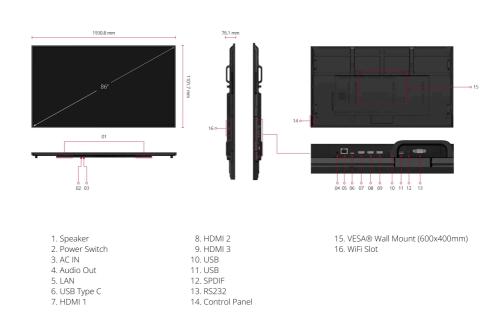

Visit Us

www.viewsonic.com

DISPLAY

DISPLAY	
Panel Size:	86"
Type/ Tech:	TFT LCD Module. DLED backlight
Display Area (mm):	1895.04(H) × 1065.96(V) 86" diagonal
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	8bit+FRC
Brightness:	500 nits (typ.)
Contrast Ratio:	1200:1 (typ.) / 2000:1 (DCR enabled)
Response Time:	8ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 Hours
Surface Treatment:	Hardness: 3H, Anti-glare coating, Haze 25%
Bezel:	15.9/15.9/15.9/15.9 mm (L/R/T/B)
Orientation: PLATFORM	Landscape & Portrait
Processor:	Quad-core ARM Cortex-A73
RAM:	4GB DDR4
Storage:	32GB
INPUT	
HDMI:	x3 (HDMI 2.1 4K@60Hz*3, HDMI 3 supports ARC)
RS-232:	x 1
WiFi Slot:	x 1
ОИТРИТ	
Audio:	3.5mm x1
RS232:	x 1
LAN	
RJ45:	x1 (10/100M for USB Type-C)
USB	
Type A:	USB2.0 x 2
Type C:	x1 (DP 1.2, USB 2.0, 15W PD, Ethernet sharing, Smart USB)
SPEAKERS	
10W x 2	
COMPATIBILITY	0040V0400 0001
HDMI:	3840X2160 @60Hz
EMBEDDED OS	
Android 14 AOSP	
BUNDLED SOFTWARE Wireless Presentation:	AirSync
Wireless Presentation:	AirSync
Device Management: ViewSonic Launcher:	Manager Yes
	165
POWER	100-240 VAC +/- 10%
Voltage:	
Consumption:	120.95W with Energy Star
ERGONOMICS	

600x400 mm

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% RH non-condensing

OPERATING HOURS

24/7

DIMENSIONS (WXHXD)

Physical (inch / mm): 1930.8 x 1101.7 x 68 mm

WEIGHT

Net (lb / kg): 42kg 56.95kg Gross (lb / kg):

REGULATIONS

cTUVus, FCC/ICES003, Energy star 8, EPEAT Silver, EEI, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCH DoC, Packing waste, CA65 DoC

PACKAGE CONTENTS

- 1. 3M power cord
- 2. Remote control

- 2. Nemote control
 3. AAA battery x 2
 4. Quick Start Guide
 5. RS232 adapter
 6. Wall mount Screw x 4
 7. HDMI cable 3 M(HDMI LA certified)
- 8. Compliance statement

Wall Mount (VESA®):