ViewBoard IFP6534


Key Features

- EPEAT Gold Certification with 20% better power efficiency than the previous generation.
- Integrated ViewSonic Education Software empowers teachers and boosts learning outcomes.
- EDLA-certified Android 14 unlocks Google Play Store access for a world of apps.
- Quad-core CPU and microSD port deliver fast performance with expandable storage.
- Dual USB-C ports power fast transfers, reliable charging, and effortless connectivity.



Product **Description**

Start your EdTech journey right with the ViewBoard IFP34 Series, designed with enhanced writing functionality and optimized power efficiency to meet the needs of K12 and higher education. Powered by EDLA-certified Android 14, it offers a smooth, see experience with full access to the Play Store for endless educational and productivity apps. Integrated ViewSonic Education Software takes it even further, adding powerful tools for digital whiteboarding, wireless casting, and centralized device managen Together, these features empower educators to create engaging, interactive learning environments, all while simplifying classroom workflows.

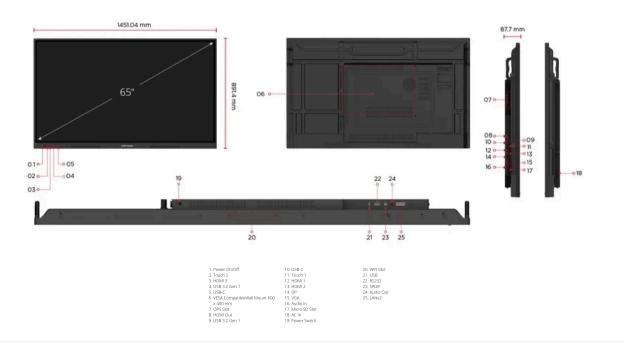

| DISPLAY | | EMBEDDED OS | |
|--------------------|---|---|--|
| Panel Size: | 65" | CO Android 14 EDLA | |
| Panel Type: | TFT LCD Module with DLED Backlight. | BUNDLE SOFTWARE | |
| Display Area (mm): | 1428.48(H) x 816.02(V) | Basic Annotation Software: | myViewBoard |
| Aspect Ratio: | 16:9 | Pro Annotation Software: | myViewBoard for Windows (Embedded in optional Windows Slot-in PC) |
| Resolution: | UHD 3840x2160(Pixels) | Wireless Presentation: | AirSync |
| Colors: | 1.07B colors | Device Management: | Manager |
| Brightness: | 350 nits | ViewSonic Launcher: | Yes |
| Contrast Ratio: | 5000:1 (max. with DCR enabled) | SPECIAL FEATURES | |
| Response Time: | 8ms | All-in-one USB port: | (combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels. |
| Viewing Angles: | H=178, V=178 | Simple LAN sharing between I | FP 10/100M for Android & Slot-in PC |
| Backlight Life: | 50,000 Hours (8 hours of use per day) | and slot-in device: | |
| Surface Treatment: | Hardness: 9H Pencil hardness with Anti-glare coating | Light Sensor: | Yes |
| Orientation: | Landscape | POWER Voltage: | 100-240V AC |
| PLATFORM | | - | |
| Processor: | Quad-core | Consumption: ERGONOMICS | On:78.26W ; Off: ≤ 0.5W |
| RAM: | 8GB DDR4 | Wall Mount (VESA®): | 600*400 |
| Storage: | 128 GB | OPERATING CONDITIONS | |
| тоисн | | Temperature (° C): | 0°C to 40°C |
| Type/ Tech: | Ultra Fine Touch Technology | Humidity: | 20% ~ 80% RH non-condensing |
| Touch Resolution: | 32767 x 32767 | DIMENSIONS (W X H X D) | , , , , , , , , , , , , , , , , , , , |
| Touch Point: | 40 points touch | Physical (inch / mm): | 58.4 x 35.1 x 3.45 (in.) / 1482.2 x 891.4 x 87.7 (mm) |
| Palm Rejection: | Yes | Packaging (inch / mm): | 64.56 x 39.76 x 7.28 (in.) / 1640 x 1010 x 185(mm) |
| INPUT | | WEIGHT | |
| HDMI: | x3 (Front x1: HDMI2.1 4K@60Hz/HDCP 2.3/CEC; Rear x 2:HDMI2.1 4K@60Hz/HDCP 2.3/CEC/ARC for HDMI 2) | Net (lb / kg): | 80.25lb / 36.4kg |
| RGB / VGA: | x1 | Gross (lb / kg): | 101.19lb / 45.9kg |
| DisplayPort: | x1 | REGULATIONS | |
| Audio: | x1 | FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH SVHC List, & DoC, EEL, WEEE, BSM | |
| RS232: | x1 | PACKAGE CONTENTS | |
| SD/SDHC: | x1 | 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Passive pen x 2 5. Quick Start Guide Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3 | |
| OPS: | x1 (Optional Intel Standard OPS) | COMPATIBLE SLOT-IN PC | |
| WiFi: | x1 (Optional VB-WIFI-004/VB-WIFI-006/VSB-050) | VPC3X, VPCF5-2A, VPCF5, VPC-A31-O1 | |
| OUTPUT | | | |
| HDMI: | HDMI 2.0 x1 | | |
| Audio: | x1 | | |
| SPDIF: | x1 | | |
| LAN | | | |
| RJ45: | x2 | | |
| USB | | | |
| Туре А: | USB3.2 Gen 1 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear) | | |
| Туре В: | USB 3.0 x2 (Rear x1 + Front x1) | | |
| Туре С: | Front*1 [PD65W (15W with OPS, 65W without OPS)+ DP1.2 + Data + 10M/100M sharing)] Rear*1 [PD15W + DP1.2 + Data + 10M/100M sharing] | | |
| SPEAKERS | | | |
| 20W x 2 | | | |
| TOP CAMERA PLATE | | | |
| Yes | | | |
| | | | |

Copyright © ViewSonic Corporation 2000-2025. All rights reserved.