

RCLDR-OD800-34U-A

LDR Assembled 34U Outdoor Server Rack Cabinet 700x800mm

Outdoor free standing

- *Enhance door hinges with 130 degrees operation angle
- *Double wall structure for cabinet body
- *Rear single solid metal panel
- *Ventilation:air conditioner1000W AC cooling
On back door
- *Cable entrance at bottom panel with base
- *Varies specification upon customers' special requirements
- *Width: 700mm, Depth:800mm
- Height:34U
- *Application method:floor standing by base
- *Customized size is available



Standard and Material:

Comply with ANSI/EIA,RS-310-D;IEC297-2;DIN41491:PART1;DIN41494:PART7;GB/T3047.2-92 and ETSI standard

Surface Finish:Degrease,acid pickling,rust prevention and parkerizing,pure water cleaning, static electricity powder coating

Material: Galvanized steel, optional SPCC cold rolled steel

Thickness: Mounting profile:2.0mm,others: 1.50mm

Color/Body color:RAL7035 gray color

RCLDR-OD800-34U-A Floor Mount IP65 Outdoor Cabinet Images




Front Door View



Back View



Inside View

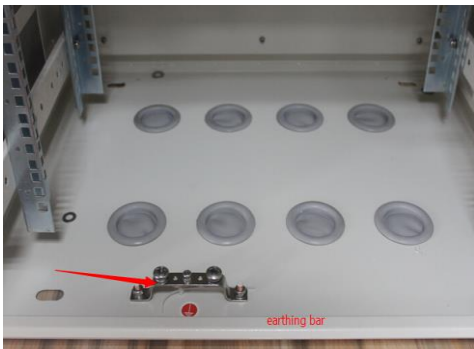

Copper Earthing Bar



AC

Parameters

Item	600/800 wide	Materials	Treatment	Note
Frame	2	1.5mm Galvanized steel	Powder coating	
Front Door	1	Solid galvanized steel	\	single/double wall type
Side Door	0	\	\	
Back Door	1	galvanized steel1.5mm	\	single/double wall type
Lock	2	\	\	Handle Lock
Top cover	1	1.5mm Galvanized steel	Powder coating	
Rear door panel	1	1.5mm Galvanized steel	Powder coating	Optional open
Ac fan	2/4	\	\	Optional
Bottom panel	1	Galvanized steel T=2.0	Powder coating	
Mounting angle	2	Galvanized steel T=1.5	Powder coating	
19inch rails	4	Galvanized steel T=2.0	Powder coating	